


## Bay Marchand/Timbalier Bay RG3D®

644 Sq. Km (245.95 Sq. Miles) | Offshore Southeast Louisiana

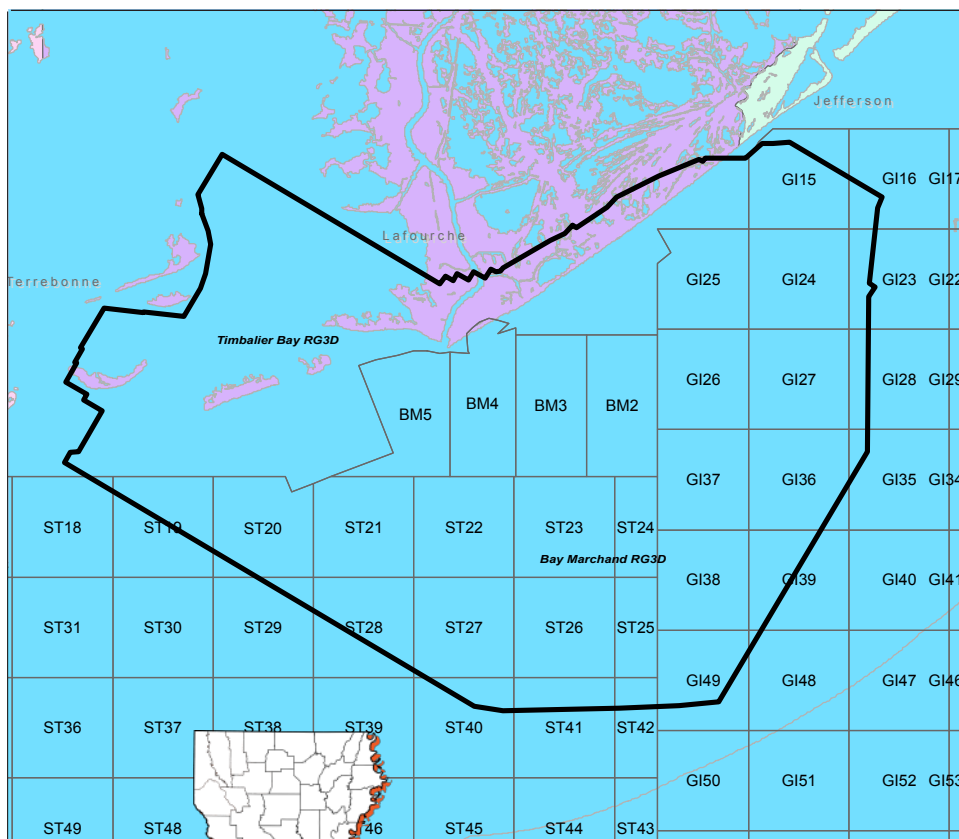

**RG3D WIDE AZIMUTH  
HIGH DENSITY  
ULTRA LONG OFFSET OBC**

Bin Size: 25 m x 25 m (82 ft x 82 ft)  
Nominal Fold: Bay Marchand - 240  
Timbalier Bay - 480

### SOURCE PARAMETERS

Source Point Interval: 50 m (164 ft)  
50 m / 25 m (Tim. Bay)  
Source Line Spacing: 200 m (656 ft)  
Energy Source: 32 gun airgun array  
95.2 Bar M at 4 m  
16 gun airgun array  
23 Bar M at 2m

### RECORDING PARAMETERS

Receiver Point Interval: 50 m (164 ft)  
Receiver Line Spacing: 500 m (1,640 ft)  
Recording Patch: 4 lines x 360 receivers  
Record Length: 12 seconds  
Processing Length: 12 seconds  
Maximum Far Offset: 10,304 m  
(33,806 ft)  
Maximum Far Offset Inline: 8,975 m  
(29,446 ft)  
Maximum Far Offset Crossline: 4,725 m  
(15,502 ft)  
Recording System: Sercel 408 ULS  
Sensor: Dual Sensor Hydrophone  
10 Hz Vertical Geophone

### PROCESSING DELIVERABLES

Kirchhoff PSTM, PSDM, RTM

Data current as of October 22, 2014

### DATA OWNED BY:



### DATA AVAILABLE

For complete  
Multi Client Data Information:  
[www.globalgeophysical.com/MultiClient](http://www.globalgeophysical.com/MultiClient)

